



## LCD Screen 3-Axis Keyboard Controller



### Features

- Controls up to maximum 255 CCTV receivers
- Built-in requital ability for electricity failure: Power, Auto Pan, Preset Position
- Preset control: 32 Positions memory set for each camera
- Pan/Tilt, Zoom by 3-Axis Joystick
- Can be connected with up to 8 sub-keyboards

### Diagram

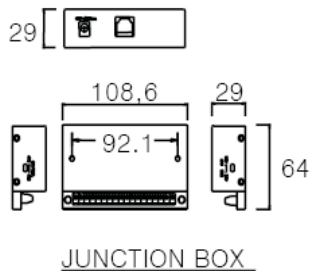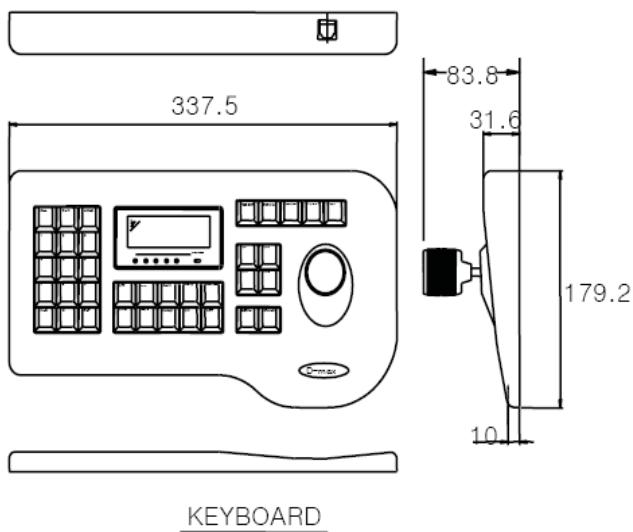

### Specification

ITEM	INS-DCK255
Control	Pan/Tilt, Zoom by 3-Axis Joystick, Power, Auto Pan, AUX Control x2, Preset
Connecting Unit	Receiver, Speed Dome camera
Comm. Method	RS-485 (422)
Comm. Speed	RS485 - 9600bps, N, 8, 1
Connector	Modular cable connection with junction box Power supplied via junction box
Package	Junction Box, 5M cable (modular jacks both ends)
Operating Distance	Max. 1.2km (When using shielded twisted pair cable)
Power	DC9V, 500mA
Power Consumption	6W
Operating Temp.	0°C ~ +40°C
Dimension	337.5(W) x 50(H) x 153(D)mm
Weight	3.5Kg

Specifications are subject to change without any prior notice.